

Frese diamantate per flex uso a secco

Dry use - Utilisation sans eau - Gebrauch ohne wasser

Art. **53DS**
Ø 20



Art. **54AS**
Ø 25



Art. **55S**
Ø 35




Art. **56S**
Ø 40



Art. **57S**
Ø 50



Art. **57AS**
Ø 60



Art. **58S**
Ø 65



made in Italy



ART. 95B
ART. 95D



ART. 87D - Guida a V per iniziare il foro
Guide to V in order to begin the hole
Guide de V afin de commencer le trou
Führer zu V zwecks die Bohrung anfangen

I Per foratura a secco con FLEX su:
Gres porcellanato, Klinker, Monocottura, Marmi duri, Granito.

Attacco filettato M14.
5/8" UNC a richiesta.

GB For dry boring with FLEX on:
porcelain gres, klinker, Single-fired, hard marble, granite.

Thread M14.
5/8" UNC on request.

F Pour effectuer des trous à sec avec FLEX sur :
Grès porcellainé, klinker, mono-cuisson, Marbres durs, Granit.

Attache filet M14.
5/8" UNC sur demande.

D Für Trockenfräsen mit FLEX bei:
Porzellanisiertem Steinzeug Klinker, Granit, Einmalgebranntes, Hartem Marmor.

Gewinde M14.
5/8" UNC auf Anfrage.

I Durata: usata correttamente può fare più di 40 fori su gres porcellanato spessore 1 cm.

GB Duration: used correctly, it can make more than 40 holes on Porcelain gres thickness 1 cm.

F Durée: utilisée correctement, elle peut faire plus de 40 trous sur de Grès porcellainé épaisseur 1 cm.

D Lebensdauer: bei richtigem Einsatz mehr als 40 Bohrungen durch 1 cm dickes porzellanisiertes Steinzeug.

Art.	DESCRIZIONE	DESCRIPTION	
	FRESE DIAMANTATE per foratura a secco con FLEX su: Gres porcellanato, Klinker, Marmi duri, Granito, attacco filetto M14 (5/8"UNC a richiesta). (confezionate in blister)	DIAMOND CUTTER HEADS for perforation to dry on: Klinker, Porcelain gres, Hard concrete, Hard marble, Granite, Thread M14 (5/8"UNC on request). (confection in blister)	
87D	Guida a V per iniziare il foro.	Guide to V in order to begin the hole	1
53DS	Fresa Ø mm 20 (11.000 rpm)	Cutter head Ø 20 mm	1
54AS	Fresa Ø mm 25 (11.000 rpm)	Cutter head Ø 25 mm	1
55S	Fresa Ø mm 35 (11.000 rpm)	Cutter head Ø 35 mm	1
56S	Fresa Ø mm 40 (11.000 rpm)	Cutter head Ø 40 mm	1
57S	Fresa Ø mm 50 (11.000 rpm)	Cutter head Ø 50 mm	1
57AS	Fresa Ø mm 60 (11.000 rpm)	Cutter head Ø 60 mm	1
58S	Fresa Ø mm 65 (11.000 rpm)	Cutter head Ø 65 mm	1
95D	Espositore per frese diamantate con attacco per Flex (completo con una fresa Ø 20-25-35-50-65) sconto 10%	Display for Diamond cutter Heads for perforation to dry (Complete with one Head Ø 20-25-35-50-65) 10% discount	1
95B	Espositore per frese diamantate con attacco per Flex (senza frese)	Display for Diamond cutter Heads for perforation to dry (without Head)	1

Accessori


Accessories - Accessoires - Zubehör

sigma
di Ambrogiani



43A

nuovo
new

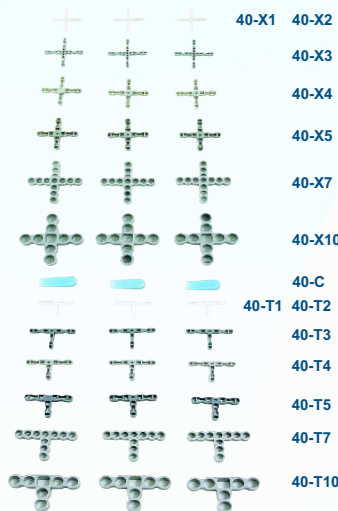

40-X1 40-X2

40-X3

40-X4

40-X5

40-X7

40-X10

40-C

40-T1

40-T2

40-T3

40-T4

40-T5

40-T7

40-T10



46F

106726

46D

46C

46B

Art.	DESCRIZIONE	DESCRIPTION	
43A	Valigetta porta utensili, completa di utensili diamantati per Flex: Art. 75B disco diamantato turbo professionale Ø115, Art. 75C disco diamantato a settori ravvicinati Ø115, Art. 72C mola diamantata per levigatura a secco Ø115, Art. 54AS fresa a secco Ø 25 mm Art. 55S fresa a secco Ø 35 mm Art. 57S fresa a secco Ø 50 mm, metro, occhiali antinfortunistici, matita.	Suitcase tool holder, complete with diamond tools for Flex: Art. 75B professional turbo diamond blade Ø115, Art. 75C diamond disc close sector Ø115, Art.72C Grinding Cup Wheels Ø115 for dry use, Art.54AS diamond cutter heads Ø 25 mm, Art.55S diamond cutter heads Ø 35mm, Art.57S diamond cutter heads Ø 50 mm , meters, safety goggles, pencil.	1
	Sconto promozionale 6%	Promotional 6% discount	
75B	Disco diamantato Ø 115 - foro 22,2 - ultrasottile, spessore 1,3 mm Turbo Professionale.	Ultra - thin diamond blade, Ø 115 mm - 22,2 mm hole - 1,3mm thick for cut Professional turbo .	1
75C	Disco diamantato Ø 115 - foro 22,2 mm, spessore 1,3 mm per taglio Settori ravvicinati.	Ultra - thin diamond blade, Ø 115 mm - 22,2 mm hole - 1,3mm thick for cut Close sector.	1
72C	Mola Diamantata Ø 100 per levigatura a secco con FLEX Attacco M14(5/8"UNC a richiesta)	Grinding Cup Wheels Ø 100 for dry use.Thread M14 (5/8"UNC on request).	1
54AS	Fresa Ø mm 25 (11.000 rpm)	Cutter head Ø 25 mm	1
55S	Fresa Ø mm 35 (11.000 rpm)	Cutter head Ø 35 mm	1
57S	Fresa Ø mm 50 (11.000 rpm)	Cutter head Ø 50 mm	1
	Distanziatori per piastrelle, sacchetti da 500 pezzi	Tiling Spacers bags of 500 pieces	
40-X1	500 pz. a X spessore mm.1 - H.4	500 pcs. X thickness mm.1 - H.4	40
40-X2	500 pz. a X spessore mm.2 - H.4	500 pcs. X thickness mm.2 - H.4	40
40-X3	500 pz. a X spessore mm.3 - H.4,5	500 pcs. X thickness mm.3 - H.4,5	40
40-X4	500 pz. a X spessore mm.4 - H.4,5	500 pcs. X thickness mm.4 - H.4,5	40
40-X5	500 pz. a X spessore mm.5 - H.4,5	500 pcs. X thickness mm.5 - H.4,5	40
40-X7	500 pz. a X spessore mm.7 - H.6	500 pcs. X thickness mm.7 - H.6	10
40-X10	500 pz. a X spessore mm.10 - H.8	500 pcs. X thickness mm.10 - H.8	10
40-C	500 Spessori a Cuneo 0-5 mm.	500 Tiling Wedges 0-5 mm.	40
40-T1	500 pz. a T spessore mm.1 - H.4	500 pcs. T thickness mm.1 - H.4	40
40-T2	500 pz. a T spessore mm.2 - H.4	500 pcs. T thickness mm.2 - H.4	40
40-T3	500 pz. a T spessore mm.3 - H.4,5	500 pcs. T thickness mm.3 - H.4,5	40
40-T4	500 pz. a T spessore mm.4 - H.4,5	500 pcs. T thickness mm.4 - H.4,5	40
40-T5	500 pz. a T spessore mm.5 - H.4,5	500 pcs. T thickness mm.5 - H.4,5	40
40-T7	500 pz. a T spessore mm.7 - H.6	500 pcs. T thickness mm.7 - H.6	10
40-T10	500 pz. a T spessore mm.10 - H.8	500 pcs. T thickness mm.10 - H.8	10
46F	Ginocchiere con Gel professionali traspiranti ad alta stabilità, chiusura con velcro (paio) Conforme UNI EN 14404	Kneelers professional breathable high stability, with Gel, and Velcro closure (pair). Compliant UNI EN 14404	5
46	Ginocchiere professionali U.S.A. avvolgenti (paio)	Professional wraparound kneepads (per pair)	5
46C	Set di 4 bottoni (2 lunghi + 2 corti) per Art. 46	Set of 4 buttons (2+2) for Art.46	2
46D	Elastico al silicone per Art. 46 (singolo)	Silicone rubber strap for Art.46 (singolo)	4
106726	Imbottitura di ricambio per Art.46 (singola)	Padding for spare part for Art.46 (singola)	2
46B	Elastico per ginocchiere, ex Art.46A (singolo)	Elastic for kneepads, ex Art.46A (singolo)	1

Vendita a confezioni intere Sold in full packs only