



# Frese diamantate uso con acqua

Diamond cutterheads use with water - Fraises diamantées Utilisation avec de l'eau - Diamantfräsern Gebrauch mit wasser

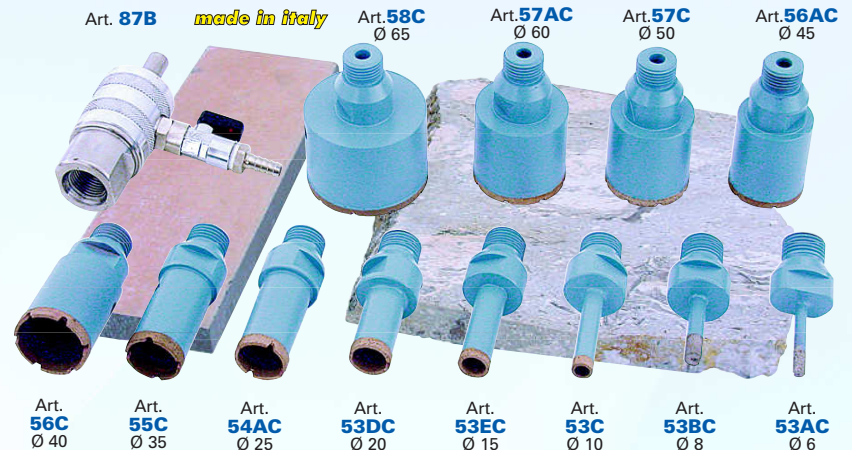

**sigma**  
di Ambrogiani

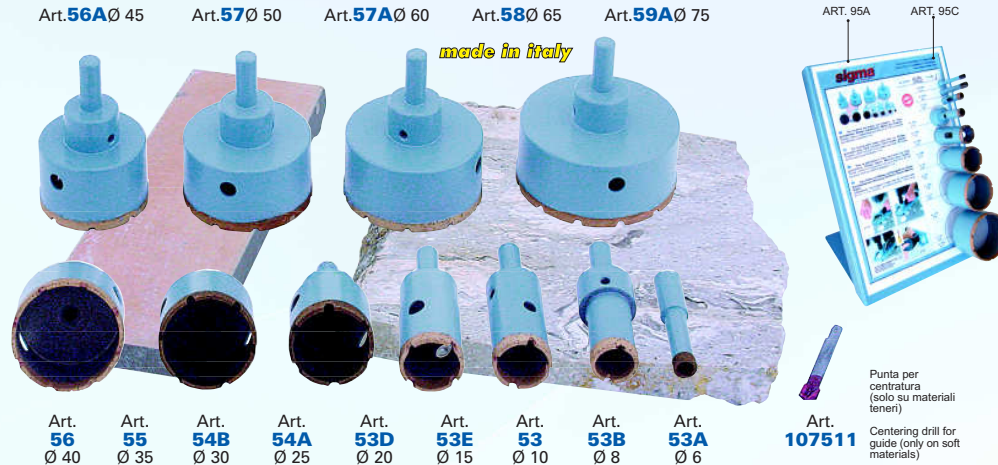

**I** Per foratura ad acqua con trapano su:  
Gres porcellanato,  
Klinker,  
Monocottura,  
Marmi duri,  
Granito.



**GB** For boring with water, with drill, on:  
porcelain gres,  
klinker,  
Single-fired,  
hard marble,  
granite.



**D** Zum Fräsen mit Wasser, mit Bohrgerät bei:  
Porzellanisiertem Steinzeug  
Klinker,  
Granit,  
Einmalgebranntes,  
Hartem Marmor.




**I** Durata: usata correttamente può fare più di 150 fori su gres porcellanato spessore 1 cm.

**GB** Duration: used correctly, it can make more than 150 holes on Porcelain gres thickness 1 cm.

**F** Durée: utilisée correctement, elle peut faire plus de 150 trous sur de Gres porcellainé épaisseur 1 cm.



**D** Lebensdauer: bei richtigem Einsatz mehr als 150 Bohrungen durch 1 cm dickes porzellanisiertes Steinzeug.



ART. 100533

*made in Italy*

| Art.   | DESCRIZIONE                                                                                                               | DESCRIPTION                                                                                                            |   |
|--------|---------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|---|
|        | FRESE DIAMANTATE attacco universale antirrotazione Ø10mm (confezionate in blister)                                        | DIAMOND CUTTER HEADS shank universal antirrotation Ø10mm (confection in blister)                                       |   |
| 87D2   | Guida per foratura con contenimento acqua                                                                                 | Guide for perforation with control water                                                                               | 1 |
| 107511 | Punta per centratura (solo su materiali teneri)                                                                           | Centering drill for guide (only on soft materials)                                                                     | 1 |
| 53A    | Fresa Ø mm 6 (3300 rpm)                                                                                                   | Cutter head Ø 6 mm                                                                                                     |   |
| 53B    | Fresa Ø mm 8 (2500 rpm)                                                                                                   | Cutter head Ø 8 mm                                                                                                     |   |
| 53     | Fresa Ø mm 10 (2000 rpm)                                                                                                  | Cutter head Ø 10 mm                                                                                                    |   |
| 53E    | Fresa Ø mm 15 (1300 rpm)                                                                                                  | Cutter head Ø 15 mm                                                                                                    |   |
| 53D    | Fresa Ø mm 20 (1000 rpm)                                                                                                  | Cutter head Ø 20 mm                                                                                                    |   |
| 54A    | Fresa Ø mm 25 (800 rpm)                                                                                                   | Cutter head Ø 25 mm                                                                                                    |   |
| 54B    | Fresa Ø mm 30 (660 rpm)                                                                                                   | Cutter head Ø 30 mm                                                                                                    |   |
| 55     | Fresa Ø mm 35 (570 rpm)                                                                                                   | Cutter head Ø 35 mm                                                                                                    |   |
| 56     | Fresa Ø mm 40 (500 rpm)                                                                                                   | Cutter head Ø 40 mm                                                                                                    |   |
| 56A    | Fresa Ø mm 45 (440 rpm)                                                                                                   | Cutter head Ø 45 mm                                                                                                    |   |
| 57     | Fresa Ø mm 50 (400 rpm)                                                                                                   | Cutter head Ø 50 mm                                                                                                    |   |
| 57A    | Fresa Ø mm 60 (330 rpm)                                                                                                   | Cutter head Ø 60 mm                                                                                                    |   |
| 58     | Fresa Ø mm 65 (300 rpm)                                                                                                   | Cutter head Ø 65 mm                                                                                                    |   |
| 59A    | Fresa Ø mm 75 (260 rpm)                                                                                                   | Cutter head Ø 75 mm                                                                                                    |   |
| ****   | Altre misure disponibili a richiesta                                                                                      | Other measures available on request                                                                                    |   |
| 95C    | Espositore per frese diamantate con attacco cilindrico Ø10 mm (completo con una fresa Ø 6-8-10-15-25-35-50-65) sconto 10% | Display for Diamond cutter Heads Ø10 mm shank (Komplet with one Head Ø 6-8-10-15-25-35-50-65) promotional 10% discount |   |
| 95A    | Espositore Art.95C senza frese                                                                                            | Display Art.95C without cutter Heads                                                                                   | 1 |
| 100533 | Stick per ravvivatura utensili diamantati cm.21,5x10x5,5                                                                  | Grindstone for dressing the diamond tools cm.21,5x10x5,5                                                               | 1 |

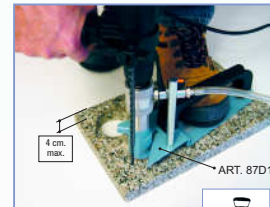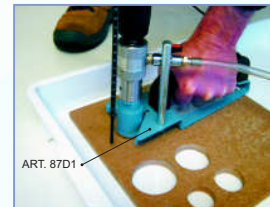

**I** Per foratura ad acqua con trapano e adattatore Art.87B su:  
Gres porcellanato,  
Klinker,  
Monocottura,  
Marmi duri,  
Granito.

**GB** For boring with water, with drill and adapter Art. 87B, on:  
porcelain gres,  
klinker,  
Single-fired,  
hard marble,  
granite.

**F** Pour la perforation à l'eau, avec foret et adaptateur Art.87B, sur:  
Gres porcellainé,  
Klinker,  
mono-cuisson,  
Marbres durs,  
Granit.

**D** Zum Fräsen mit Wasser, mit Bohrgerät und Adapter Art. 87B bei:  
Porzellanisiertem Steinzeug  
Klinker,  
Granit,  
Einmalgebranntes,  
Hartem Marmor.

**I** Durata: usata correttamente può fare più di 150 fori su gres porcellanato spessore 1 cm.

**GB** Duration: used correctly, it can make more than 150 holes on Porcelain gres thickness 1 cm.

**F** Durée: utilisée correctement, elle peut faire plus de 150 trous sur de Gres porcellainé épaisseur 1 cm.

**D** Lebensdauer: bei richtigem Einsatz mehr als 150 Bohrungen durch 1 cm dickes porzellanisiertes Steinzeug.



ART. 100533

*made in Italy*

| Art.   | DESCRIZIONE                                                                           | DESCRIPTION                                                                                              |   |
|--------|---------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|---|
|        | FRESE DIAMANTATE attacco conico 1/2" per Adattatore Art.87B (confezionate in blister) | DIAMOND CUTTER HEADS 1/2" conical shank for Art. 87B (confection in blister)                             |   |
| 87B    | ADATTATORE INOX porta-fresa diamantate, conico 1/2", attacco per trapano Ø12 mm.      | 1/2" Conical Stainless steel ADAPTER for diamond cutter heads. Can be fitted to any drill, Ø12 mm shank. | 1 |
| 87D1   | Guida a V per iniziare il foro, con fermo antirrotazione.                             | Guide to V in order to begin the hole, with firm antispin.                                               | 1 |
| 106724 | Vasca in PVC 60-40-06 per acqua di foratura                                           | Containment PVC-tank 60x40x6 cm. for water drilling                                                      | 1 |
| 53AC   | Fresa Ø mm 6 (3300 rpm)                                                               | Cutter head Ø 6 mm                                                                                       | 1 |
| 53BC   | Fresa Ø mm 8 (2500 rpm)                                                               | Cutter head Ø 8 mm                                                                                       | 1 |
| 53C    | Fresa Ø mm 10 (2000 rpm)                                                              | Cutter head Ø 10 mm                                                                                      | 1 |
| 53EC   | Fresa Ø mm 15 (1300 rpm)                                                              | Cutter head Ø 15 mm                                                                                      | 1 |
| 53DC   | Fresa Ø mm 20 (1000 rpm)                                                              | Cutter head Ø 20 mm                                                                                      | 1 |
| 54AC   | Fresa Ø mm 25 (800 rpm)                                                               | Cutter head Ø 25 mm                                                                                      | 1 |
| 55C    | Fresa Ø mm 35 (570 rpm)                                                               | Cutter head Ø 35 mm                                                                                      | 1 |
| 56C    | Fresa Ø mm 40 (500 rpm)                                                               | Cutter head Ø 40 mm                                                                                      | 1 |
| 56AC   | Fresa Ø mm 45 (440 rpm)                                                               | Cutter head Ø 45 mm                                                                                      | 1 |
| 57C    | Fresa Ø mm 50 (400 rpm)                                                               | Cutter head Ø 50 mm                                                                                      | 1 |
| 57AC   | Fresa Ø mm 60 (300 rpm)                                                               | Cutter head Ø 60 mm                                                                                      | 1 |
| 58C    | Fresa Ø mm 65 (300 rpm)                                                               | Cutter head Ø 65 mm                                                                                      | 1 |
| ****   | Altre misure disponibili a richiesta                                                  | Other measures available on request                                                                      | 1 |
| 100533 | Stick per ravvivatura utensili diamantati cm.21,5x10x5,5                              | Grindstone for dressing the diamond tools cm.21,5x10x5,5                                                 | 1 |